

PROXIMITY CARD ACCESS CONTROL SYSTEM



Support USB



Access Control Connection




Door bell Connection

- Easy installation system with high speed operating.
- Standalone or network environment.
- Built-in access controller, Support 99 time zones, 5 groups, 10 door-opening combinations.
- 24 hours continuous operation available.
- More security, multiplex alarm alert support.
- Support EM 125 KHz proximity card or compatible card.


JEZI-103

SKETCH DIAGRAM

Standalone

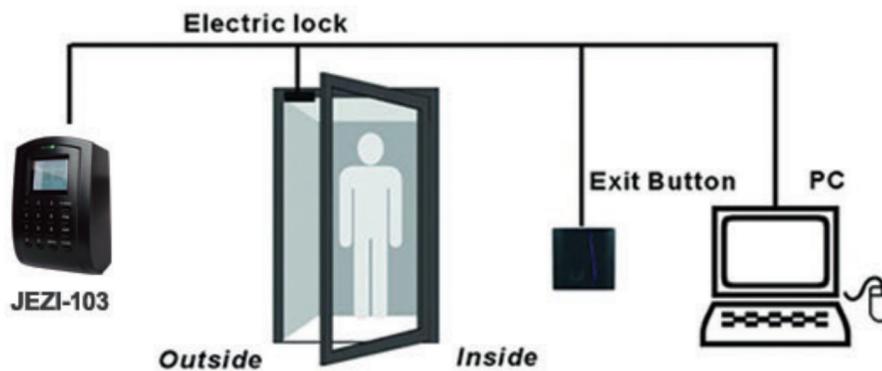

Network

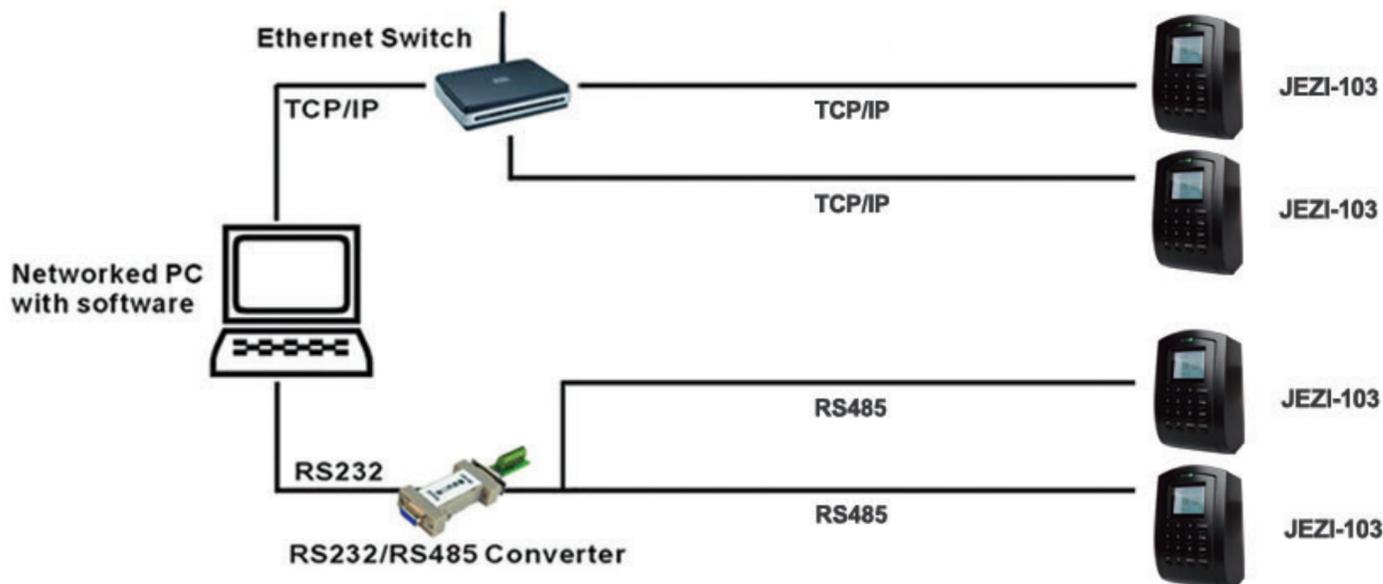

SPECIFICATION

JEZI-103

LCD Display

4 lines character white LCD 128*64

Speaker

Voice prompt (language can be selected)

Capacity

Cards: 30,000 Logs: 50,000

Verification

Verification speed (1:1) ≤ 0.5s

Identification speed (1:1) ≤ 20ms

Attendance status

Check in/out

Communications

TCP/IP, RS232/485, USB Host/Client, Wiegand in/out

Access Mode

Card only, PIN only, Card+PIN

Function support

Workcode; SMS; 9 PIN user ID; Auto status

Language

Multi language, English, French, Spanish, Arabic, Turkish, Portuguese, Czech, Hebrew, Slavic, Vietnamese etc., for more than 40 languages can be selected

Environment

Operation temperature:0°C-45°C Operation humidity:20%-80%

Power Supply

110/220 VAC - 12VDC 3A(PS-3A is optional item)

Access Control

50 times zones, 5 groups, 10 open door combination, supports multi-users enter, TTL for connecting to lock, door sensor, exit button, alarm

Package info.

Machine size:13.5(L)*9.5(W)*4.5(H)cm

Unit packing:25*15*9cm Carton packing:53*33*45cm

Real weight:0.75kg Volum weight:1.0kg

Customize Function

Webserver; Anti-pass back; Mifare card reader; HID card reader